



---

# HE101-U Owner's Manual

HDMI 2.0 Ultra HD/4K Cable Repeater



PureLink™  
535 East Crescent Avenue  
Ramsey, NJ 07446, USA  
Tel: 201.488.3232  
Fax: 201.621.6118

E-mail: [info@purelinkav.com](mailto:info@purelinkav.com)  
[www.purelinkav.com](http://www.purelinkav.com)

For technical support, contact:  
[support@purelinkav.com](mailto:support@purelinkav.com)

# Table of Contents

---

1-1 Package Contents	p.3
1-2 General Specification	p.3
1-3 Operation and Reliability Specifications	p.5
1-4 Main Features	p.6
1-5 Operation Guide & Mechanical Specification	p.6
1-6 Warranty Information	p.8

Manual version	Release date
1.0	1/16/2017

## 1-1 Package Contents

Please make sure all of the following items are included in the package:

- 1) HE101-U Unit
- 2) Owner's Manual

## 1-2 General Specification

### Welcome!

Congratulations on your purchase of the PureLink HE101-U Ultra HD/4K HDMI cable repeater. This manual contains information that will assist you in installing and operating the product.

PureLink HE101-U is a HDMI cable repeater that actively monitors incoming HDMI signal to compensate for signal loss when using a long HDMI cable, lower quality HDMI cable, or source device with poor HDMI signal output. It extends Ultra High Definition (UHD) and 4K signals up to 66 ft (20 m) and 1080p signals up to 132 ft (40 m).

Item	Description
Model	HE101-U
Input type	HDMI Single Link , 1 port
Output type	HDMI Single Link , 1 port
Supported Input/Output Resolution	Ultra HD/4K Up to 4096 x 2160 @ 50/60Hz (RGB 4:4:4 YCbCr 4:4:4, 4:2:2, 4:2:0)
Connector type	HDMI 19 Pin Female Micro USB power jack
Supported format	HDMI 2.0
HDCP Compliant	Yes, Pass thru, HDCP 2.2

Multi-channel Audio	Yes, Pass thru
HDR support	Yes, Pass thru
CEC support	Yes, Pass thru
EDID	Pass thru
Power	HDMI (via HDMI pin# 18) or Micro USB DC +5V , 2A, Max 10W * Micro USB is an optional, does not come with the unit
Dimension (WxDxH)	1.1" x 2.0" x 0.8" (28 x 52 x 21 mm)
Weight	0.50 lbs (0.2 kg)

### Connector Pin Assignment

Part No.	Pin No.	Description	Remarks
HDMI 19pin	1	TMDS DATA 2P	
	2	TMDS DATA 2 Shield	
	3	TMDS DATA 2M	
	4	TMDS DATA 1P	
	5	TMDS DATA 1 Shield	
	6	TMDS DATA 1M	
	7	TMDS DATA 0P	
	8	TMDS DATA 0 Shield	
	9	TMDS DATA 0M	
	10	TMDS Clock P	
	11	TMDS Clock Shield	
	12	TMDS Clock M	
	13	CEC	
	14	RESERVED	
	15	DDC Clock	
	16	DDC DATA	
	17	GND	
	18	+5v	
	19	Hot Plug Detect	

## 1-3 Operation and Reliability Specification

---

### 1. Operating Environment

Temperature : 32F ~ 104F (0°C~ 40°C)  
Humidity : 20% ~ 90%  
Altitude : 3,000m Max.

### 2. Transit Environment

Temperature : -13F ~ 140F (-25°C~ 60°C)  
Humidity : 5% ~ 95%  
Altitude : 15,000m Max.

### 3. Storage Environment

Temperature : -4F ~ -140F (-20°C~ 60°C)  
Humidity : 20% ~ 90%  
Altitude : 3,000m Max.

### 4. Reliability

MTBF: 90% at over 50,000 hours aging test

- In compliance with LCD Monitor reliability test standard

## 1-4 Main Features

---

- Range extension up to 33 ft (10 m) for 4K60Hz 4:4:4 Ultra HDTV resolution, (5 m on the input to the HE101-U and 5 m on the output)
- Range extension up to 66 ft (20 m) for 4K60Hz 4:2:0 Ultra HDTV resolution, (10 m on the input to the HE101-U and 10 m on the output)
- Range extension up to 132 ft (40 m) for 1080p HDTV resolution, (20 m on the input to the HE101-U and 20 m on the output)
- Maximum bandwidth : 18 Gbps
- HDCP 2.2 and HDCP 1.4 compliance (pass thru)
- PureLink signal re-generation & repeating technology that allows the HDMI digital signal to travel longer distances
- Can be powered directly from the HDMI source. If the source device delivers enough 5V power to the HE101-U, it does not require optional micro USB power injected.
- LED signal and power indicator


## 1-5 Operation Guide & Mechanical Specification

---

### Hardware Connection

1. Turn off the whole system before connecting.
2. Connect your video source's HDMI output port to the HE101-U's HDMI input port using standard HDMI cables (not included)
3. Connect your HDMI display's HDMI input port to HE101-U's HDMI output port
4. Plug the 5V power supply to HE101-U (optional)
5. Plug the 5V wall mount power supply into the wall outlet (optional)
6. Turn on your monitor
7. Turn on your video source

## Mechanical Specification

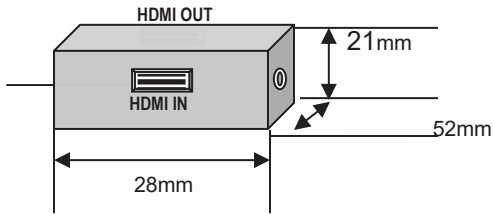

HDMI IN: HDMI Input Signal

HDMI OUT: HDMI Output Signals

LED Power: 5V DC Power Indicator

## Input/Output Cable Length Specification

Resolution	Input cable length	Output cable length
4K60 4:4:4	5m	5m
4K60 4:2:0	10m	10m
4K30 4:4:4	20m	20m
2K	20m<	20m<
1080P	20m<	20m<
720P	20m<	20m<
1024x768	20m<	20m<

\* To achieve signal travel distance shown in above table, PureLink recommends the use of PureLink's HDMI cables (PI, ULS, and PLH series)

# 1-6 Warranty

---

## **Manufacturer's Warranty (3-Year)**

PureLink warrants HE101-U to be free from defects in workmanship and materials, under normal use and service, for a period of three (3) years from the date of purchase from PureLink or its authorized resellers.

If the product does not operate as warranted during the applicable warranty period, PureLink shall, at its option and expense, execute one of the following as necessary:

1. Repair the defective product or part
2. Deliver to customer and equivalent product or part to replace the defective item
3. Refund to customer the purchase price paid for the defective product

All products that are replaced become the property of PureLink. Replacement products may be new or reconditioned, Repaired or replacement products or parts come with a 90-day warranty or the remainder of the warranty period. PureLink shall not be responsible for any software, firmware, information, or memory data loss of contained in, stored on, or integrated with any products returned to PureLink for repair under warranty.

## **Customer Service**

Any customer service inquiries can be submitted electronically through the Q&A form on our website ([www.purelinkav.com](http://www.purelinkav.com)).

For immediate assistance please contact us at (201) 488-3232 to reach our customer care or tech support team.